

Generator set data sheet



Model: C1400 D5
Frequency: 50
Fuel type: Diesel

Spec sheet:	SS16-CPGK
Noise data sheet (open/enclosed):	ND50-OSHHP/ND50-CSHHP
Airflow data sheet:	AF50-HHP
Derate data sheet (open/enclosed):	DD50-OSHHP/DD50-CSHHP
Transient data sheet:	RTF

Fuel consumption	Standby				Prime			
	kVA (kW)				kVA (kW)			
Ratings	1400 (1120)				1250 (1000)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
US gph	24	41	59	77	22	38	54	69
L/hr	91	158	224	291	84	144	203	263

Engine	Standby rating	Prime rating
Engine manufacturer	Cummins	
Engine model	KTA50-G3	
Configuration	Cast iron, 60 ° V16 cylinder	
Aspiration	Turbocharged and aftercooled	
Gross engine power output, kWm	1227	1097
BMEP at set rated load, kPa	1951	1744
Bore, mm	159	
Stroke, mm	159	
Rated speed, rpm	1500	
Piston speed, m/s	7.9	
Compression ratio	13.9:1	
Lube oil capacity, L	152	
Overspeed limit, rpm	1725 ±50	
Regenerative power, kW	116	
Governor type	Electronic	
Starting voltage	24V Volts DC	

Fuel flow	
Maximum fuel flow, L/hr	625
Maximum fuel inlet restriction, mm Hg	203
Maximum fuel inlet temperature, °C	70

Air	Standby rating	Prime rating
Combustion air, m ³ /min	104.8	96.3
Maximum air cleaner restriction, kPa	6.2	

Exhaust

Exhaust gas flow at set rated load, m ³ /min	240.7	223.6
Exhaust gas temperature, °C	525	520
Maximum exhaust back pressure, kPa	6.7	

Standard set-mounted radiator cooling

Ambient design, °C	40	
Fan load, kWm	46	
Coolant capacity (with radiator), L	424	
Cooling system air flow, m ³ /sec @ 12.7 mmH ₂ O	27.6	
Total heat rejection, Btu/min	44000	38500
Maximum cooling air flow static restriction mm H ₂ O	12.7	

Weights*

	Open	Enclosed
Unit dry weight kgs	9190	17002
Unit wet weight kgs	9613	17425


* Weights represent a set with standard features. See outline drawing for weights of other configurations.

Dimensions


	Length	Width	Height
Standard open set dimensions	5105	2000	2238
Enclosed set standard dimensions (with exhaust stack)	12192	2438	2896 (3233)

Genset outline

Open set

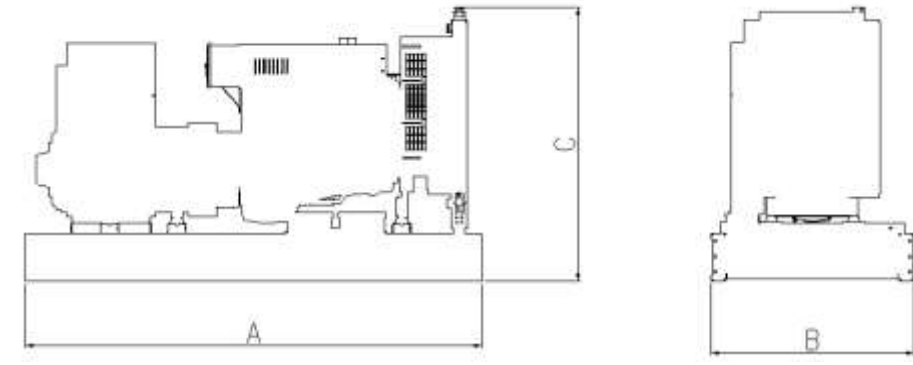

Enclosed set

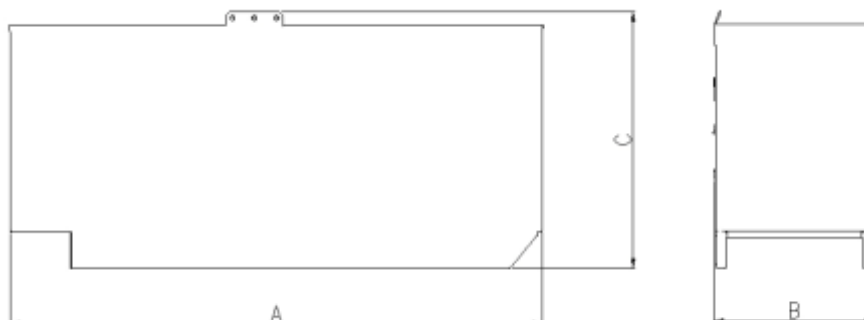

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Alternator data

Connection	Temp rise °C	Duty	Alternator	Voltage
Wye, 3-phase	150/125C	S/P	P7B	380-440V

Ratings definitions

Emergency standby power (ESP):	Limited-time running power (LTP):	Prime power (PRP):	Base load (continuous) power (COP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) is in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

Formulas for calculating full load currents:

Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

Single phase output

$$\frac{\text{kW} \times \text{SinglePhaseFactor} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Cummins Power Generation
 Manston Park, Columbus Avenue
 Manston, Ramsgate
 Kent CT12 5BF, UK
 Telephone: +44 (0) 1843 255000
 Fax +44 (0) 1843 255902
 E-mail: cpg.uk@cummins.com
 Web: www.cumminspower.com



power.cummins.com

Our energy working for you.™

©2017 Cummins Power Generation Inc. All rights reserved.
 Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others. Specifications are subject to change without notice.
 DS44g-CPGK A055S601 (02/17)

